



DATA SHEET

AGC 150 Automatic Transfer Switch (ATS)



1. AGC 150 ATS	
1.1 About	3
1.1.1 Software packages	3
1.2 Single-line application diagrams	3
1.2.1 Applications with two breakers	3
1.2.2 Applications with three breakers	4
1.3 Functions and features	4
1.3.1 General functions	4
1.3.2 ATS controller functions	5
1.3.3 Emulation	5
1.3.4 Easy configuration with the utility software	5
1.4 Protections overview	6
2. AGC 150 ATS with 2 breakers	
2.1 Display, buttons and LEDs	8
2.2 Typical wiring	9
3. AGC 150 ATS with 3 breakers	
3.1 Display, buttons and LEDs	10
3.2 Typical wiring	11
4. Compatible products	
4.1 Remote monitoring service: Insight	12
4.2 Additional inputs and outputs	12
4.3 Additional operator panel, AOP-2	12
4.4 Remote display: AGC 150	12
4.5 Other equipment	12
5. Technical specifications	
5.1 Electrical specifications	13
5.2 Environmental specifications	15
5.3 UL/cUL Listed	16
5.4 Communication	16
5.5 Approvals	16
5.6 Dimensions and weight	17
6. Legal information	
6.1 Software version	18

1. AGC 150 ATS

1.1 About

The AGC 150 Automatic Transfer Switch (ATS) controller can automatically transfer the power supply from its primary source to a backup source when it detects a failure or outage. The controller can handle all types of power sources. The ATS can control up to three breakers, which means that you can use it in a wide range of emergency power solutions.

The AGC 150 is a compact, all-in-one controller. Each AGC 150 contains all necessary 3-phase measuring circuits.


Operators can easily control the gensets and breakers from the display units. Alternatively, use the communication options to connect to an HMI/SCADA system.

1.1.1 Software packages


You can choose the **Stand-alone** and **Core** software packages.

1.2 Single-line application diagrams

1.2.1 Applications with two breakers

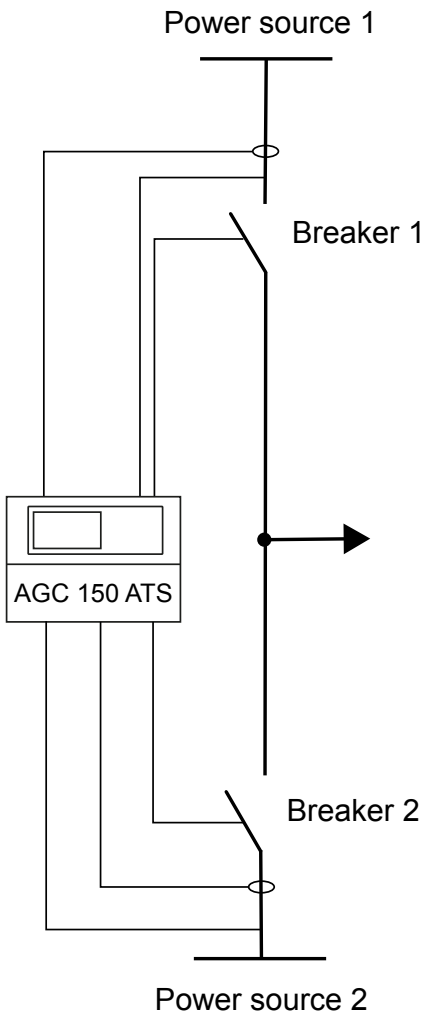

1.2.2 Applications with three breakers

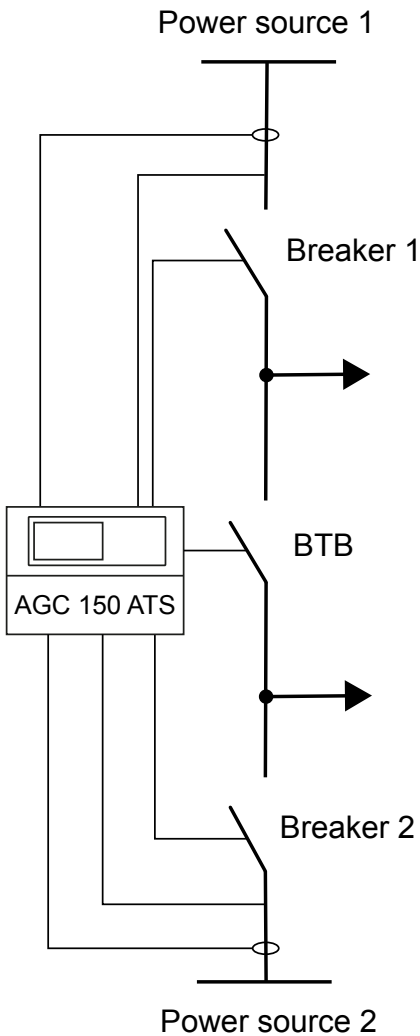

1.3 Functions and features

1.3.1 General functions

AC functions	Stand-alone	Core
100 to 690 V AC (selectable)	•	•
CT -/1 or -/5 (selectable)	•	•
Select the AC configuration: <ul style="list-style-type: none"> • 3-phase/3-wire • 3-phase/4-wire • 2-phase/3-wire (L1/L2/N or L1/L3/N) • 1-phase/2-wire L1 	•	•
4th current measurement <ul style="list-style-type: none"> • Power source 2 current 	•	•
Sets of nominal settings	4	4

General functions	Stand-alone	Core
Emulation for testing and front load commissioning	•	•
PLC logic (M-Logic)	20 lines	20 lines
Counters, including: <ul style="list-style-type: none"> • Breaker operations • kWh meter (day, week, month, total) • kvarh meter (day, week, month, total) 	•	•

Setting and parameter functions	Stand-alone	Core
Password-protected setup	•	•
Trending with the USW	•	•
Event logs with password, up to 500 entries	•	•

Display and language functions	Stand-alone	Core
Supports multiple languages (including Chinese and other languages with special characters)	•	•
20 configurable graphical screens	•	•
Graphical display with six lines	•	•
Parameters can be changed on the display unit	•	•

Modbus functions	Stand-alone	Core
Modbus RS-485	•	•
Modbus TCP/IP	•	•
Configurable Modbus area	•	•

1.3.2 ATS controller functions

Functions	Stand-alone	Core
Synchronisation		•
Overlap		•
Auto change and recover	•	•
Priority of source	•	•
Shift at blackout	•	•
Protections	•	•


1.3.3 Emulation

AGC 150 ATS includes an emulation tool to verify and test the functionality of the application, for example breaker handling.

Emulation is useful for training and for testing basic functionality that needs to be set up or verified.

1.3.4 Easy configuration with the utility software

You can use the utility software to quickly configure the inputs, outputs, and parameters.

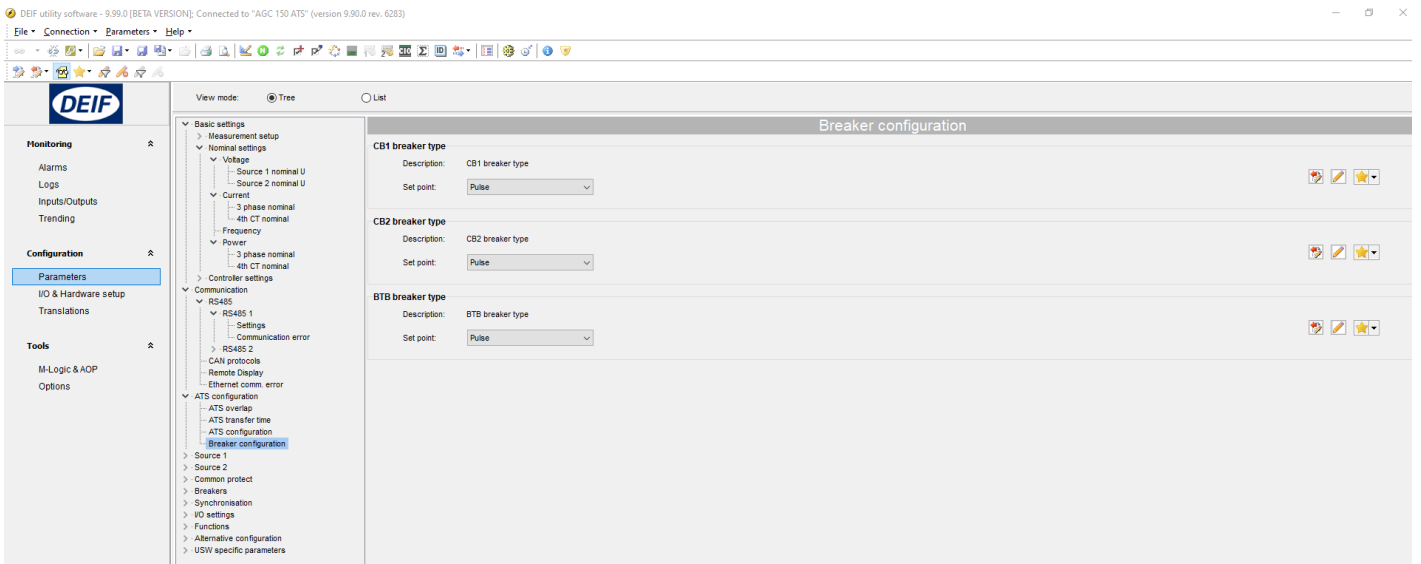


1.4 Protections overview

Protections	Alarms	ANSI	Operate time
Reverse power	2	32R	<200 ms
Fast over-current	2	50P	<40 ms
Over-current	4	50TD	<200 ms
Voltage dependent over-current	1	51V	
Over-voltage	2	59	<200 ms
Under-voltage	3	27P	<200 ms
Over-frequency	3	81O	<300 ms
Under-frequency	3	81U	<300 ms
Unbalanced voltage	1	47	<200 ms
Unbalanced current	1	46	<200 ms
Under-excitation or reactive power import	1	32RV	<200 ms
Over-excitation or reactive power export	1	32FV	<200 ms
Overload	5	32F	<200 ms
Earth current	1	51G	<100 ms
Neutral current	1	51N	<100 ms
Emergency stop	1	1	<200 ms
Low auxiliary supply	1	27DC	
High auxiliary supply	1	59DC	
Breaker 1 (CB1) external trip	1	5	
Breaker 2 (CB2) external trip	1	5	
BTB breaker external trip	1	5	
Synchronisation failure alarms		25	
Breaker open failure	3	52BF	
Breaker close failure	3	52BF	
Breaker position failure	3	52BF	

Protections	Alarms	ANSI	Operate time
Close before excitation failure	1	48	
Phase sequence error	1	47	
Hz/V failure	1	53	
Not in Auto	1	34	
Vector jump	1	78	<40 ms
df/dt (ROCOF)	1	81R	<130 ms
Under-voltage and reactive power, U and Q	2		<250 ms
Positive sequence (mains) voltage low	1	27	<60 ms
Directional over-current	2	67	<100 ms
Negative sequence voltage high	1	47	<400 ms
Negative sequence current high	1	46	<400 ms
Zero sequence voltage high	1	59U0	<400 ms
Zero sequence current high	1	50G	<400 ms
Power-dependent reactive power	1	40	-
IEC/IEEE inverse time over-current	1	51	-


2. AGC 150 ATS with 2 breakers

2.1 Display, buttons and LEDs

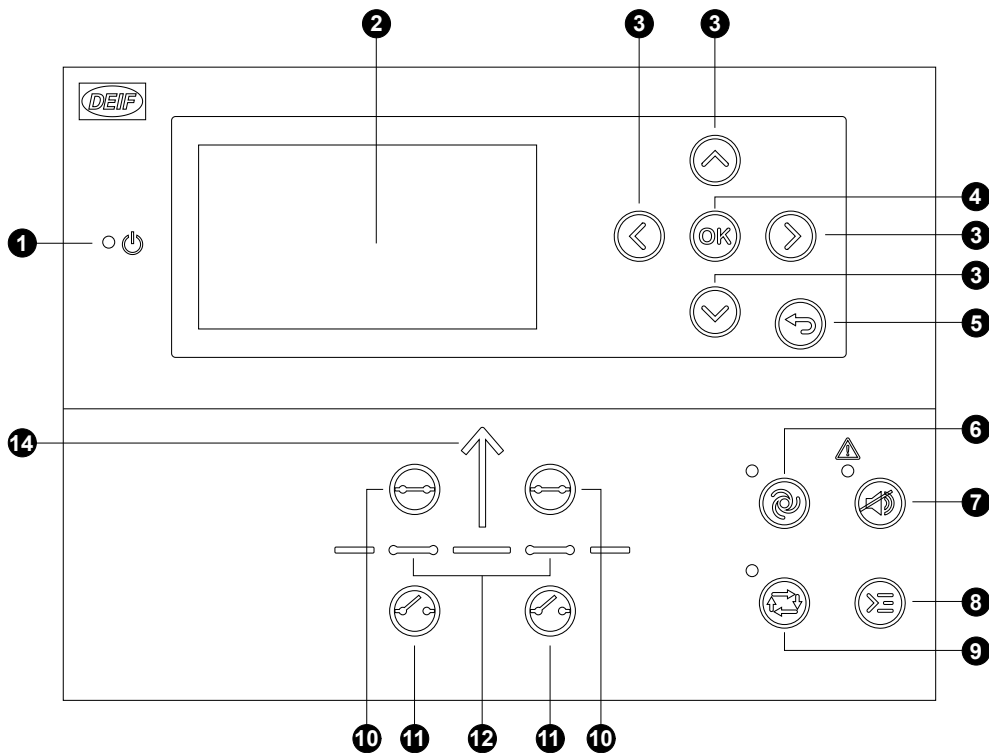

No.	Name	Function
1	Power	Green: The controller power is ON. OFF: The controller power is OFF.
2	Display screen	Resolution: 240 x 128 px. Viewing area: 88.50 x 51.40 mm. Six lines, each with 25 characters.
3	Navigation	Move the selector up, down, left and right on the screen.
4	OK	Go to the Menu system. Confirm the selection on the screen.
5	Back	Go to the previous page.
6	AUTO mode	The controller automatically connects and disconnects the breakers. No operator actions are needed.
7	Silence horn	Stops an alarm horn (if configured) and enters the Alarm menu.
8	Shortcut menu	Access the ATS priority selection, Jump menu, Mode selection, Lamp test.
9	SEMI-AUTO mode	The operator or an external signal can connect or disconnect the breakers. The controller cannot automatically connect or disconnect the breakers. The controller automatically synchronises before closing a breaker.
10	Close breaker	Push to close the breaker.
11	Open breaker	Push to open the breaker.
12	Breaker symbols	Green: Breaker is closed. Green flashing: Synchronising. Red: Breaker failure.
14	Load symbol	Green: The supply voltage and frequency are OK. Red: Supply voltage/frequency failure.

2.2 Typical wiring

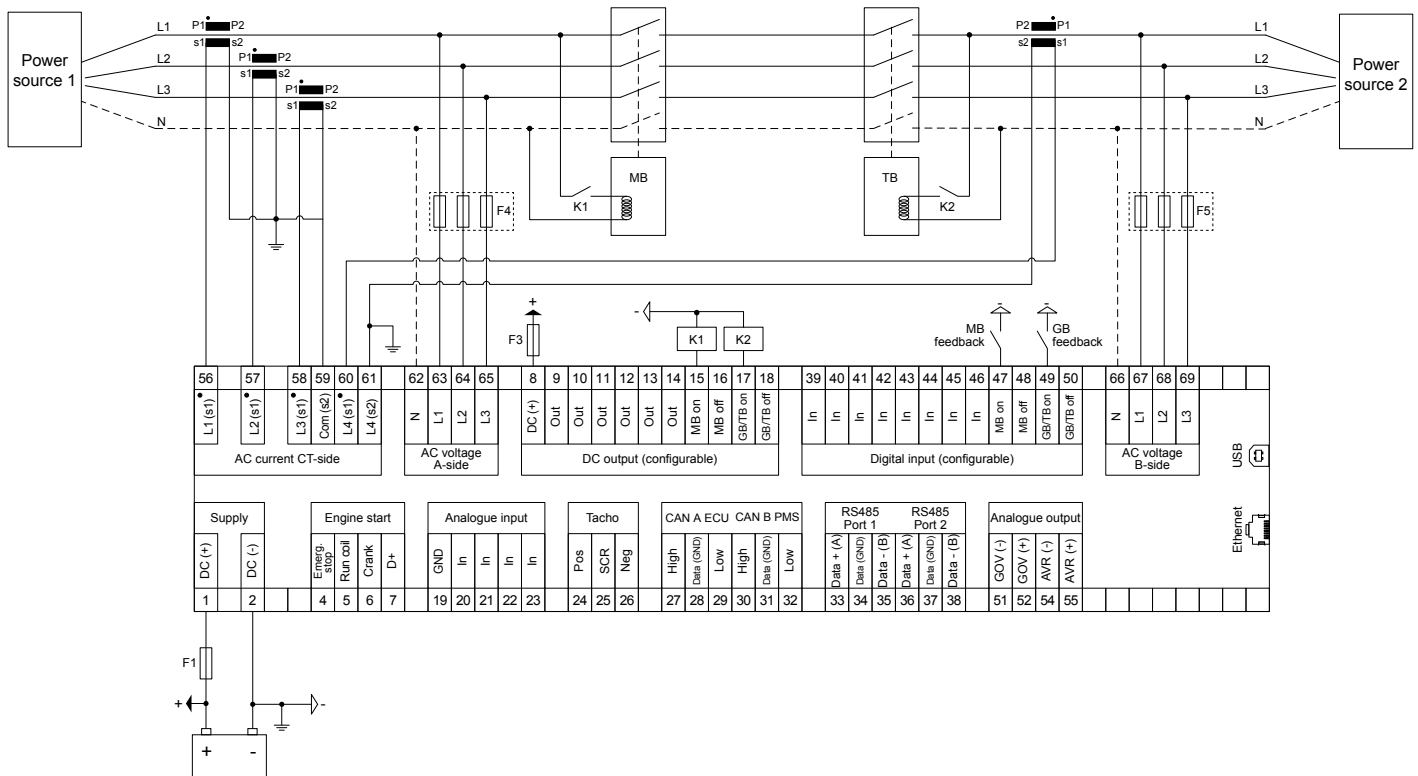


Fuses

- F1: 2 A DC max. time-delay fuse/MCB, c-curve
- F3: 4 A DC max. time-delay fuse/MCB, b-curve
- F4, F5: 2 A AC max. time-delay fuse/MCB, c-curve


3. AGC 150 ATS with 3 breakers

3.1 Display, buttons and LEDs

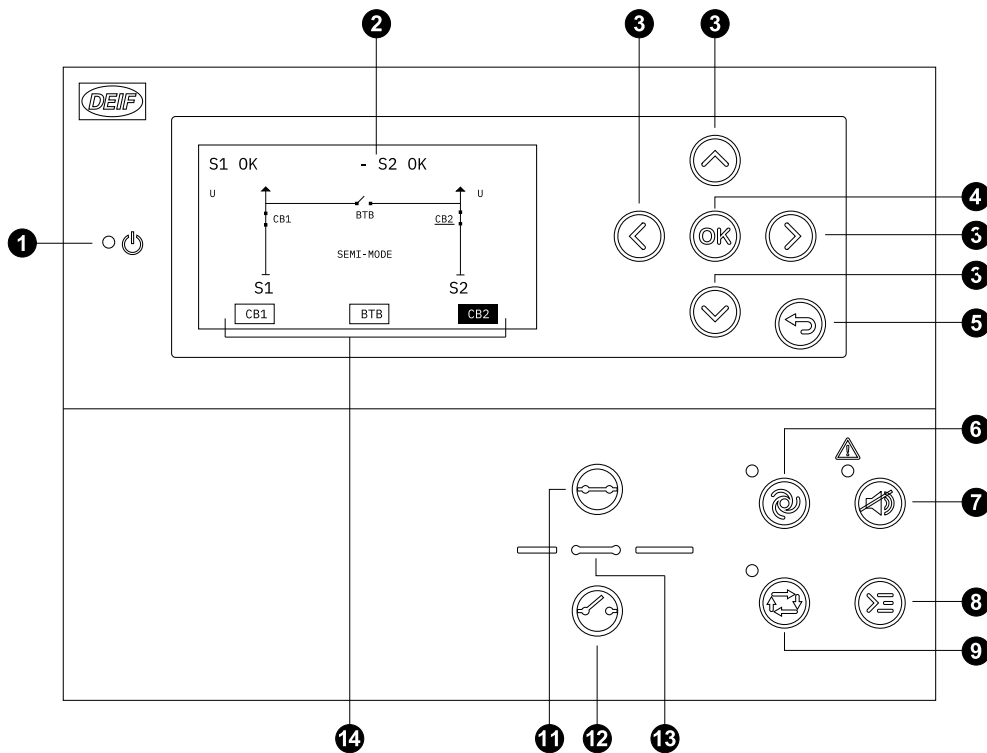

No.	Name	Function
1	Power	Green: The controller power is ON. OFF: The controller power is OFF.
2	Display screen	Resolution: 240 x 128 px. Viewing area: 88.50 x 51.40 mm. Six lines, each with 25 characters.
3	Navigation	Move the selector up, down, left and right on the screen.
4	OK	Go to the Menu system. Confirm the selection on the screen.
5	Back	Go to the previous page.
6	AUTO mode	The controller automatically joins and splits the busbar, and connects and disconnects the breakers. No operator actions are needed.
7	Silence horn	Stops an alarm horn (if configured) and enters the Alarm menu.
8	Shortcut menu	Access the ATS priority selection, Jump menu, Mode selection, Lamp test.
9	SEMI-AUTO mode	The operator or an external signal can join or split the busbar, and connect or disconnect the breakers. The controller cannot automatically do these actions. The controller automatically synchronises before closing a breaker.
11	Close breaker	Push to close the breaker.
12	Open breaker	Push to open the breaker.
13	Breaker symbols	Green: Breaker is closed. Green flashing: Synchronising. Red: Breaker failure.
14	Breaker selection	Use the navigation arrows to select the breaker you want to control. As shown on the display, the selected breaker is highlighted.

3.2 Typical wiring

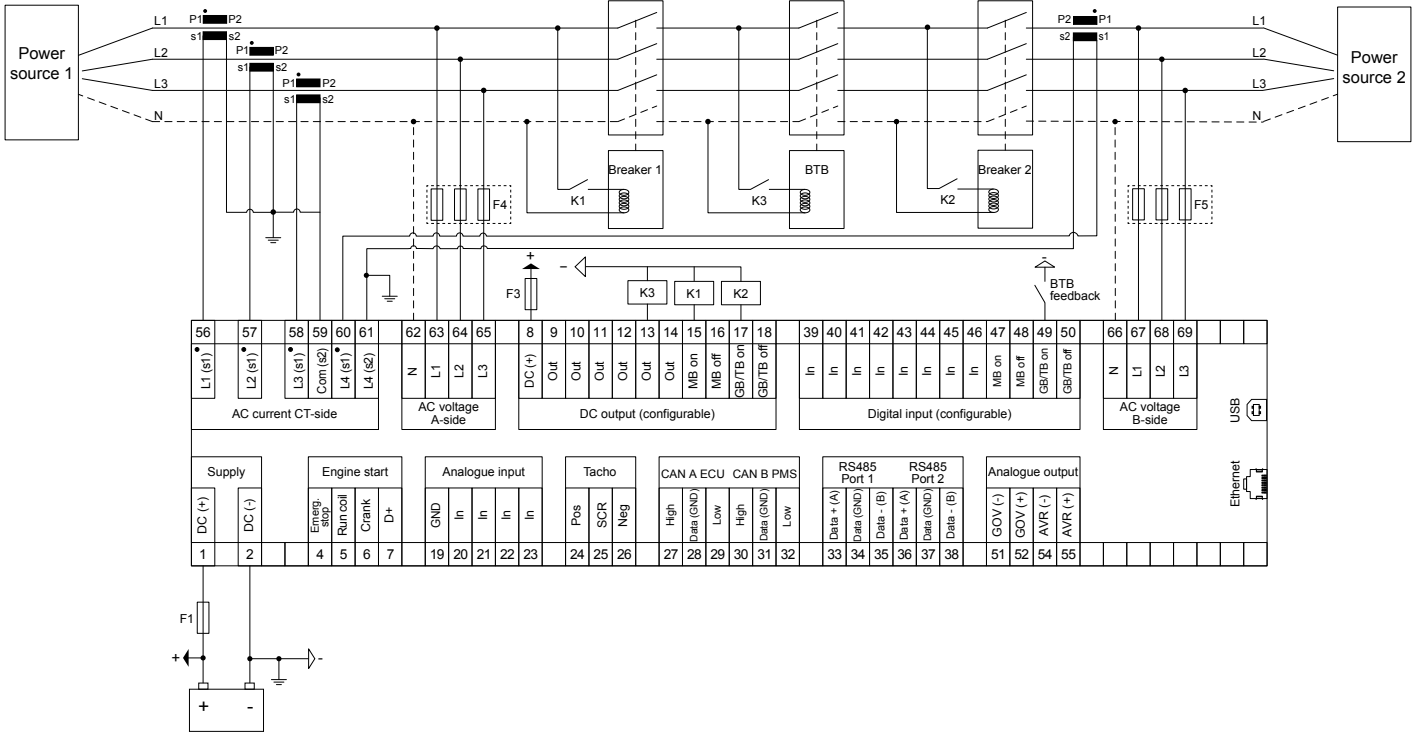

Fuses

- F1: 2 A DC max. time-delay fuse/MCB, c-curve
- F3: 4 A DC max. time-delay fuse/MCB, b-curve
- F4, F5: 2 A AC max. time-delay fuse/MCB, c-curve

4. Compatible products

4.1 Remote monitoring service: Insight

Insight is a responsive remote monitoring service. It includes real-time genset data, a customisable dashboard, GPS tracking, equipment and user management, email and/or SMS alerts, and cloud data management. See www.deif.com/products/insight

4.2 Additional inputs and outputs

AGC 150 uses CAN bus communication with these:

- **CIO 116** is a remote input expansion module. See www.deif.com/products/cio-116
- **CIO 208** is a remote output expansion module. See www.deif.com/products/cio-208
- **CIO 308** is a remote I/O module. See www.deif.com/products/cio-308

4.3 Additional operator panel, AOP-2

The controller uses CAN bus communication to the additional operator panel (AOP-2). Configure the controller using M-Logic. On the AOP-2, the operator can then:

- Use the buttons to send commands to the controller.
- See LEDs light up to show statuses and/or alarms.

4.4 Remote display: AGC 150

The remote display is an AGC 150 that only has a power supply and an Ethernet connection to an AGC 150 controller. The remote display allows the operator to see the controller's operating data, as well as operate the controller remotely.

See www.deif.com/products/agc-150-remote-display

4.5 Other equipment

DEIF has a wide variety of other equipment that is compatible. This includes synchrosopes, meters, transducers, current transformers, power supplies, and battery chargers. See www.deif.com

5. Technical specifications

5.1 Electrical specifications

Power supply	
Power supply range	Nominal voltage: 12 V DC or 24 V DC Operating range: 6.5 to 36 V DC
Voltage withstand	Reverse polarity
Power supply drop-out immunity	0 V DC for 50 ms (coming from min. 6 V DC)
Power supply load dump protection	Load dump protected according to ISO16750-2 test A
Power consumption	5 W typical 12 W max.
RTC clock	Time and date backup

Supply voltage monitoring	
Measuring range	0 V to 36 V DC Max. continuous operating voltage: 36 V DC
Resolution	0.1 V
Accuracy	±0.35 V

Voltage measurement	
Voltage range	Nominal range: 100 to 690 V phase-to-phase (above 2000 m derate to max. 480 V)
Voltage withstand	$U_n + 35\%$ continuously, $U_n + 45\%$ for 10 seconds Measuring range of nominal: 10 to 135 % Low range, nominal 100 to 260 V: 10 to 351 V AC phase-to-phase High range, nominal 261 to 690 V: 26 to 932 V AC phase-to-phase
Voltage accuracy	±1 % of nominal within 10 to 75 Hz +1/-4 % of nominal within 3.5 to 10 Hz
Frequency range	3.5 to 75 Hz
Frequency accuracy	±0.01 Hz within 60 to 135 % of nominal voltage ±0.05 Hz within 10 to 60 % of nominal voltage
Input impedance	4 MΩ/phase-to-ground, and 600 kΩ phase/neutral

Current measurement	
Current range	Nominal: -/1 A and -/5 A Range: 2 to 300 %
Number of CT input	4
Max. measured current	3 A (-/1 A) 15 A (-/5 A)
Current withstand	7 A continuous 20 A for 10 seconds 40 A for 1 second
Current accuracy	From 10 to 75 Hz: <ul style="list-style-type: none"> ±1 % of nominal from 2 to 100% current ±1 % of measured current from 100 to 300 % current From 3.5 to 10 Hz:

Current measurement

	<ul style="list-style-type: none">+1/-4 % of nominal from 2 to 100 % current+1/-4 % of measured current from 100 to 300 % current
Burden	Max. 0.5 VA

Power measurement

Accuracy power	±1 % of nominal within 35 to 75 Hz
Accuracy power factor	±1 % of nominal within 35 to 75 Hz

Digital inputs

Number of inputs	12 x digital inputs Negative switching
Maximum input voltage	+36 V DC with respect to plant supply negative
Minimum input voltage	-24 V DC with respect to plant supply negative
Current source (contact cleaning)	Initial 10 mA, continuous 2 mA

DC outputs

Number of 3 A outputs	2 x outputs 15 A DC inrush and 3 A continuous, supply voltage 0 to 36 V DC Endurance tested according to UL/ULC6200:2019 1.ed: 24 V, 3 A, 100000 cycles (with an external freewheeling diode)
Number of 0.5 A outputs	10 x outputs 2 A DC inrush and 0.5 A continuous, supply voltage 4.5 to 36 V DC
Common	12/24 V DC

Analogue inputs

Number of inputs	4 x analogue inputs
Electrical range	Configurable as: <ul style="list-style-type: none">Negative switching digital input0 V to 10 V sensor4 mA to 20 mA sensor0 Ω to 2.5 kΩ sensor
Accuracy	Current: <ul style="list-style-type: none">Accuracy: ±20 uA ±1.00 % rdg Voltage: <ul style="list-style-type: none">Range: 0 to 10 V DCAccuracy: ±20 mV ±1.00 % rdg RMI 2-wire LOW: <ul style="list-style-type: none">Range: 0 to 800 ΩAccuracy: ±2 Ω ±1.00 % rdg RMI 2-wire HIGH: <ul style="list-style-type: none">Range: 0 to 2500 ΩAccuracy: ±5 Ω ±1.00 % rdg

Display unit	
Type	Graphical display screen (monochrome)
Resolution	240 x 128 pixels
Navigation	Five-key menu navigation
Log book	Data log and trending function
Language	Multi-language display

5.2 Environmental specifications

Operation conditions	
Operating temperature (incl. display screen)	-40 to +70 °C (-40 to +158 °F)
Storage temperature (incl. display screen)	-40 to +85 °C (-40 to +185 °F)
Accuracy and temperature	Temperature coefficient: 0.2 % of full scale per 10 °C
Operating altitude	0 to 4000 meters with derating
Operating humidity	Damp Heat Cyclic, 20/55 °C at 97 % relative humidity, 144 hours. To IEC 60255-1 Damp Heat Steady State, 40 °C at 93 % relative humidity, 240 hours. To IEC 60255-1
Change of temperature	70 to -40 °C, 1 °C / minute, 5 cycles. To IEC 60255-1
Protection degree	IEC/EN 60529 <ul style="list-style-type: none"> IP65 (front of module when installed into the control panel with the supplied sealing gasket) IP20 on terminal side
Vibration	Response: <ul style="list-style-type: none"> 10 to 58.1 Hz, 0.15 mmpp 58.1 to 150 Hz, 1 g. To IEC 60255-21-1 (Class 2) Endurance: <ul style="list-style-type: none"> 10 to 150 Hz, 2 g. To IEC 60255-21-1 (Class 2) Seismic vibration: <ul style="list-style-type: none"> 3 to 8.15 Hz, 15 mmpp 8.15 to 35 Hz, 2 g. To IEC 60255-21-3 (Class 2)
Shock	10 g, 11 ms, half sine. To IEC 60255-21-2 Response (Class 2) 30 g, 11 ms, half sine. To IEC 60255-21-2 Withstand (Class 2) 50 g, 11 ms, half sine. To IEC 60068-2-27, test Ea Tested with three impacts in each direction in three axes (total of 18 impacts per test)
Bump	20 g, 16 ms, half sine IEC 60255-21-2 (Class 2) Tested with 1000 impacts in each direction on three axes (total of 6000 impacts per test)
Galvanic separation	CAN port 2: 550 V, 50 Hz, 1 minute RS-485 port 1: 550 V, 50 Hz, 1 minute Ethernet: 550 V, 50 Hz, 1 minute Analogue output 51-52 (GOV): 550 V, 50 Hz, 1 minute Analogue output 54-55 (AVR): 3000 V, 50 Hz, 1 minute Note: No galvanic separation on CAN port 1 and RS-485 port 2
Safety	Installation CAT. III 600 V Pollution degree 2 IEC/EN 60255-27
Flammability	All plastic parts are self-extinguishing to UL94-V0
EMC	IEC/EN 60255-26

5.3 UL/cUL Listed

Requirements	
Installation	To be installed in accordance with the NEC (US) or the CEC (Canada)
Enclosure	A suitable type 1 (flat surface) enclosure is required Unventilated/ventilated with filters for controlled/pollution degree 2 environment
Mounting	Flat surface mounting
Connections	Use 90 °C copper conductors only
Wire size	AWG 30-12
Terminals	Tightening torque: 5-7 lb-in.
Current transformers	Use Listed or Recognized isolating current transformers
Communication circuits	Only connect to communication circuits of a listed system/equipment

5.4 Communication




Communication	
RS-485 Port 1	Used for: Modbus RTU, PLC, SCADA, Remote monitoring (Insight) Data connection 2-wire + common Isolated External termination required (120 Ω + matching cable) 9600 to 115200
RS-485 Port 2	Used for: Modbus RTU, PLC, SCADA, Remote monitoring (Insight) Data connection 2-wire + common Not isolated External termination required (120 Ω + matching cable) 9600 to 115200
RJ45 Ethernet	Used for: <ul style="list-style-type: none"> • Modbus to PLC, SCADA, and so on • NTP time synchronisation with NTP servers Isolated Auto detecting 10/100 Mbit Ethernet port
USB	Service port (USB-B)

5.5 Approvals

Standards
CE
UL/cUL Listed to UL/ULC6200:2019, 1. ed. controls for stationary engine gensets

NOTE Refer to www.deif.com for the most recent approvals.

5.6 Dimensions and weight

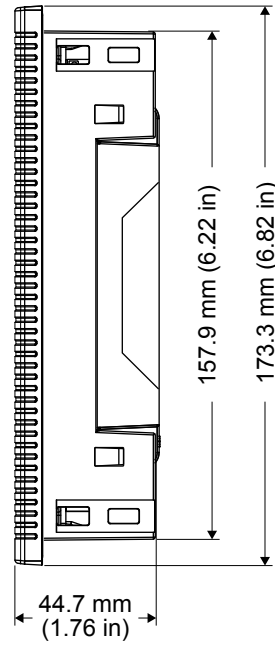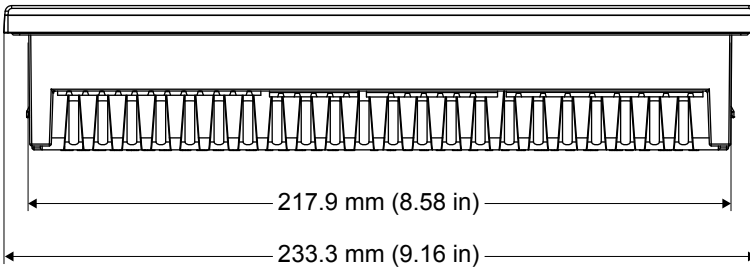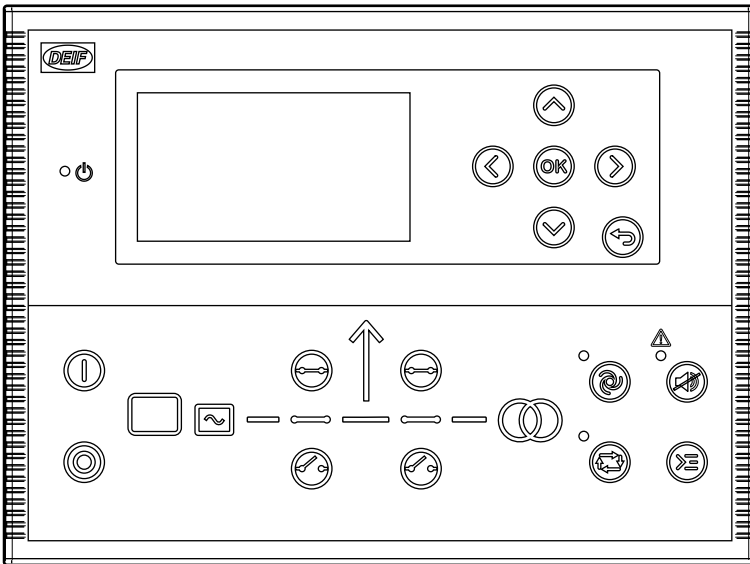

Dimensions and weight

Dimensions	Length: 233.3 mm (9.16 in) Height: 173.3 mm (6.82 in) Depth: 44.7 mm (1.76 in)
Panel cutout	Length: 218.5 mm (8.60 in) Height: 158.5 mm (6.24 in) Tolerance: ± 0.3 mm (0.01 in)
Max. panel thickness	4.5 mm (0.18 in)
Mounting	UL/cUL Listed: Type complete device, open type 1 UL/cUL Listed: For use on a flat surface of a type 1 enclosure
Weight	0.79 kg

6. Legal information

Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.

Copyright

© Copyright DEIF A/S. All rights reserved.

6.1 Software version

This document is based on AGC 150 software version 1.13.