QSX15-G4

Emissions Compliance:

Non-Certified or "Flex" program for EU Mobile applications. Formerly EU Stage2 @ 50Hz.



> Specification sheet

Our energy working for you.™



Description

The QSX15-Series is the first heavy-duty diesel with 24-valve dual overhead camshaft technology. Yet it has an impressive 30% fewer parts than comparable diesels and a utilised design, which eliminates external lube, coolant and fuel lines leading to higher reliability for such a high power output.

The 15 litre, six-cylinder QSX15 engine is ideally suited to both open and containerised applications in static or portable genset equipment. It can be matched to meet specific duty cycle and operating conditions of any genset.



This engine has been built to comply with CE certification.



This engine has been designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.

Features

Holset HX82 Turbocharging - Wastegated design optimizes operation across the torque curve with improved response.

Integrated Block Design - Integrated fluid circuits replace hoses and eliminate potential leaks.

High-Pressure Fuel Injection - Capable of over 1,900 bar (28,000 psi) for cleaner, more fuel-efficient combustion.

24-Valve Cylinder Head – Four valves per cylinder for increased power with faster response at every rpm.

Coolpac Integrated Design - Products are supplied complete with cooling package and air cleaner kit for a complete power package. Each component has been specifically developed and rigorously tested for G-Drive products, ensuring high performance, durability and reliability.

Service and Support - G-Drive products are backed by an uncompromising level of technical support and after sales service, delivered through a world class service network.

1500 rpm (50 Hz Ratings)

Gross Engine Output			Net Engine Output		Typical Generator Set Output						
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP		kWm/BHP		kWe	kVA	kWe	kVA	kWe	kVA		
407/545	366/490	257/345	385/516	348/466	239/320	360	450	327	409	224	280

1800 rpm (60 Hz Ratings)

Gross Engine Output			Net Engine Output		Typical Generator Set Output						
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP		kWe	kVA	kWe	kVA	kWe	kVA	
455/610	414/555	295/395	419/561	383/514	264/354	400	500	355	445	245	305

Our energy working for you.™



General Engine Data

Туре	4 Cycle, In-line, Turbo Charged, Air Cooled
Bore mm	137 mm (5.39 in.)
Stroke mm	169 mm (6.65 in.)
Displacement Litre	15 litre (912 in.3)
Cylinder Block	Cast iron, 6 cylinder
Battery Charging Alternator	35 amps
Starting Voltage	24 volt
Fuel System	Direct injection
Fuel Filter	Spin-on fuel filters with water separator
Lube Oil Filter Type(s)	Spin-on full flow filter
Lube Oil Capacity (I)	91.0
Flywheel Dimensions	SAE1

Coolpac Performance Data

Cooling System Design	Air-Air Charge Cooled			
Coolant Ratio	50% ethylene glycol; 50% water			
Coolant Capacity (I)	42.0			
Limiting Ambient Temp.** (°C)	55			
Fan Power (kWm)	16			
Cooling System Air Flow (m ³ /s)**	11.8			
Air Cleaner Type	Light duty dry replaceable element with restriction indicator			

^{** @ 13} mm H²0 duct Restriction

Ratings Definitions

Emergency Standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Limited-Time Running Power (LTP):

Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.

Prime Power (PRP):


Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.

Weight & Dimensions

Width	Height	Weight (dry)
mm	mm	kg
1332	1669	1658
	mm	mm mm

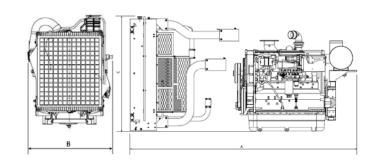

Fuel Consumption 1500 (50 Hz)

%	% kWm		L/ph	US gal/ph					
Standby Power									
100	407	545	94.1	24.9					
Prime Power	Prime Power								
100	366	490	85.7	22.6					
75	275	368	67	17.7					
50	183	245	45.7	12.1					
25	92	123	26.6	7					
Continuous Power									
100	257	345	63.6	16.8					

Fuel Consumption 1800 (60 Hz)

%	kWm	BHP	L/ph	US gal/ph					
Standby Power									
100	455	610	107.3	28.4					
Prime Power	Prime Power								
100	414	555	97.6	25.8					
75	311	416	75.2	19.9					
50	207	278	53.4	14.1					
25	104	139	31.8	8.4					
Continuous Power									
100	295	395	72.2	19.1					

Cummins G-Drive Engines

10 Toh Guan Road #07-01 TT International Tradepark Singapore 608838 Phone 65 6417 2388

Fax 65 6417 2399

Asia Pacific

Europe, CIS, Middle East and Africa Manston Park Columbus Ave Manston Ramsgate Kent CT12 5BF. UK Phone 44 1843 255000 Fax 44 1843 255902 Latin America Rua Jati, 310, Cumbica Guarulhos, SP 07180-900 Brazil Phone 55 11 2186 4552 Fax 55 11 2186 4729 Mexico Cummins S. de R.L. de C.V. Eje 122 No. 200 Zona Industrial San Luis Potosí, S.L.P. 78090 Mexico

Phone 52 444 870 6700 Fax 52 444 870 6811 North America 1400 73rd Avenue N.E. Minneapolis, MN 55432 USA Phone 1 763 574 5000 USA Toll-free 1 877 769 7669

Fax 1 763 574 5298

Our energy working for you.™





