


TAD532GE

4.76 liter, in-line 4 cylinder

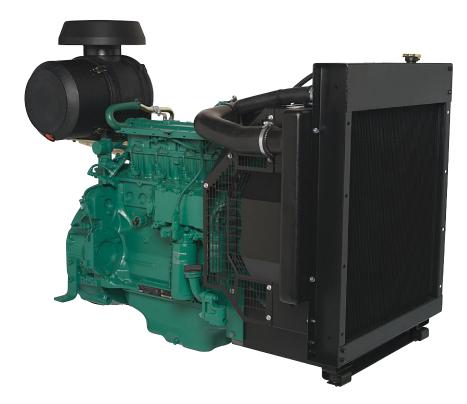

The TAD532GE is a powerful, reliable and economical Generating Set Diesel Engine.

Durability & low noise

Designed for easiest, fastest and most economical installation. Well-balanced to produce smooth and vibration-free operation with low noise level.

To maintain a controlled working temperature in cylinders and combustion chambers, the engine is equipped with piston cooling. The engine is also fitted with replaceable cylinder liners and valve seats/guides to ensure maximum durability and service life of the engine.

Low exhaust emission

The state of the art, high-tech injection and charging system with low internal losses contributes to excellent combustion and low fuel consumption.

The TAD532GE is certified for EU Stage 2 exhaust emission regulations.

Easy service & maintenance

Easily accessible service and maintenance points contribute to the ease of service of the engine.

- Electronic governing, EDC4
- · CAN bus communication
- · Compact design
- · High power to weight ratio
- · Emission compliant
- · Noise optimized engine design
- · A wide selection of optional equipment and power settings

50 Hz/1500 rpm

60 Hz/1800 rpm Prime power Standby power Prime power Standby power Gen.eff. kWm kWe kWe kWm kWe kWm kWe % kVa kWm kVa kVa 113 130 125 114 142 114 106 132 126 117

kWm = kiloWatt mechanical, net with fan*; kWe = kiloWatt electrical = kWm x Generator eff.; kVA = kiloVoltAmpere calculations based on a 0.8 power factor = kWe / 0.8

 $^{1 \}text{ kW} = 1 \text{ hp} \times 1.36$; $1 \text{ hp} = 1 \text{ kW} \times 0.7355$

^{*)} According to technical data

Technical Data


General


Engine designation No. of cylinders and configuration Method of operation Bore, mm (in.) Stroke, mm (in.) Displacement, I (in ³) Compression ratio Dry weight, kg (lb) Wet weight, kg (lb)	in 4- 108 130 4.76	-line strok (4.25 (5.12 (290	4 (e 5) (2) (1)
Wet weight, kg (lb)	.606	1336	3)

Performance with fan, kW (hp) at:	1500 rpm	1800 rpm
Prime Power Standby Power	113 (153) 125 (169)	114 (155) 126 (172)
Lubrication system	1500 rpm	1800 rpm
Lubrication system Oil consumption, liter/h (US of Prime Power Standby Power		1800 rpm 0.08 (0.021) 0.08 (0.021)

1500 rpm	1800 rpm
020 (0.200)	261 (0.423)
213 (0.345)	224 (0.364)
210 (0.340)	218 (0.353)
214 (0.346)	222 (0.359)
, ,	, ,
228 (0.370)	243 (0.393)
210 (0.340)	218 (0.354)
209 (0.339)	218 (0.354)
216 (0.350)	225 (0.365)
	239 (0.388) 213 (0.345) 210 (0.340) 214 (0.346) 228 (0.370) 210 (0.340) 209 (0.339)

Dimensions TAD532GE





Technical description

Engine and block

- Optimized cast iron cylinder block with optimum distribution of forces
- Piston cooling for low piston temperature and reduced ring temperature
- Drop forged steel connecting rods
- Crankshaft hardened bearing surfaces and fillets for moderate load on main and big-end bearings
- Keystone top compression rings for long service life
- Replaceable valve guides and valve seats
- Three PTO positions at flywheel end
- Lift eyelets
- Flywheel housing with connection acc. to SAE 2
- Flywheel for flexible coupling and friction clutch
- Transport brackets

Lubrication system

- Full flow disposable spin-on oil filter, for extra high filtration
- Rotary displacement oil pump driven by the crankshaft
- Deep centre oil sump, 30° inclination
- Oil filler on top
- Oil dipstick, short in front
- Integrated full flow oil cooler, side-mounted

Fuel system

- Six hole fuel injection nozzles
- Electronic governor with smoke limiter function
- Washable fuel prefilter with water separator
- Rotary low-pressure fuel pump
- Fine fuel filter of disposable type

Intake and exhaust system

- Connection flange for exhaust line
- Turbo charger, centre low with exhaust flange
- Closed crankcase ventilation
- Heater flange in charge air inlet (without power relay)

Cooling system

- Belt driven, maintenance-free coolant pump with high degree of efficiency
- Efficient cooling with accurate coolant control through a water distribution duct in the cylinder block
- Reliable thermostat with minimum pressure drop
- Cooling water pipe, inlet and outlet
- Fan hub
- Cooling package

Electrical system

- 12 V electrical system
- Alternator 55A / 12V, low left
- Starter motor, 3.1 kW / 12V, single pole
- ECU (without high altitude sensor) control and monitoring of oil pressure, coolant temperature, coolant level, charge air pressure, engine rpm and fuel temperature compensation
- Engine wiring

Rating guidelines

PRIME POWER rating corresponds to ISO Standard Power for continuous operation. It is applicable for supplying electrical power at variable load for an unlimited number of hours instead of commercially purchased power. A10 % overload capability for govering purpose is available for this rating.

STAND-BY POWER rating corresponds to ISO Standard Fuel Stop Power. It is applicable for supplying stand-by electrical power at variable load in areas with well established electrical networks in the event of normal utility power failure. No overload capability is available for this rating.



AB Volvo Penta

SE-405 08 Göteborg, Sweden www.volvopenta.com

Power standards

The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271. The technical data applies to an engine without cooling fan and operating on a fuel with calorific value of 42.7 MJ / kg (18360 BTU/lb) and a density of 0.84 kg/liter (7.01 lb/US gal), also where this involves a deviation from the standards. Power output guaranteed within 0 to $\pm 2\%$ att rated ambient conditions at delivery. Ratings are based on ISO 8528. Engine speed governing in accordance with ISO 8528-5.

Please contact your local Volvo Penta dealer for further information. Please note that products illustrated may differ from production models. Not all models and accessories are available in all markets, and standard equipment may vary between different markets. Every effort has been made to ensure that facts and figures are correct at the time of publication. However, Volvo Penta reserves the right to make changes without prior notice at any time.